

Installation Guide: Custom Thing Box for Pinball Machine

1. Preparation

Step 1: Unplug Your Pinball Machine

- For safety, always start by unplugging your pinball machine to avoid any electrical hazards.

2. Removal of the Old Red Box

Step 2: Remove the Old Red Box

- Follow this video tutorial: [Video Guide](#).
- Note: This process can be tedious and requires patience and steady hands.


Step 3: Remove the Phone and Corner Plastic

- While removing the old red box, we recommend also removing the plastic piece with the phone and the plastic piece located in the far corner. This will give you better access and make the installation of the new box easier.

3. Installing the New Custom Thing Box

Step 4: Insert the New Custom Thing Box

- With the old box removed, you can now insert the new custom box.
- **Adjustments:** We've made some modifications to allow you to keep the screw in the back corner and the left-hand side of the box.

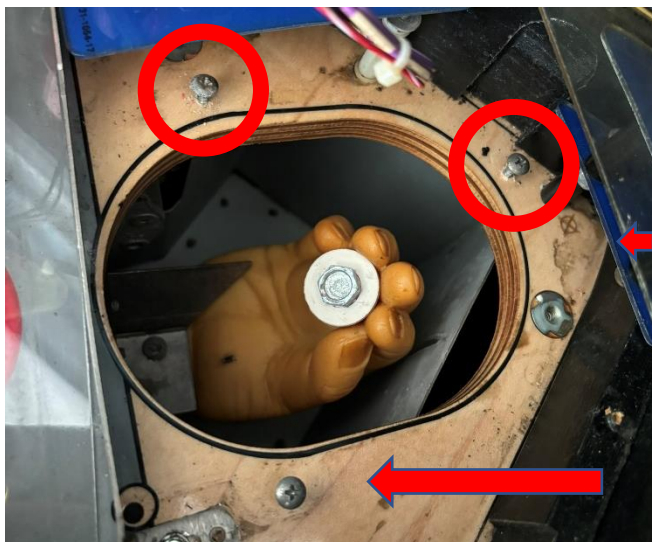

You can keep these 2 screw and slide the new box under them.

Remove this corner plastic. I tried without removing and ended up removing it after all


Remove this one and use it to adjust the positioning of the

Step 5: Secure the Box in Place

- **Back Screw:** Start by sliding the box in with the back screw first.
- **Left Screw:** Next, align and slide in the left-hand side screw.

Step 6: Final Screwing and Testing

- **Right Screw:** Secure the box by adding the screw on the right-hand side.
- **Test:** Check if the box opens and closes neatly to ensure proper installation.
-

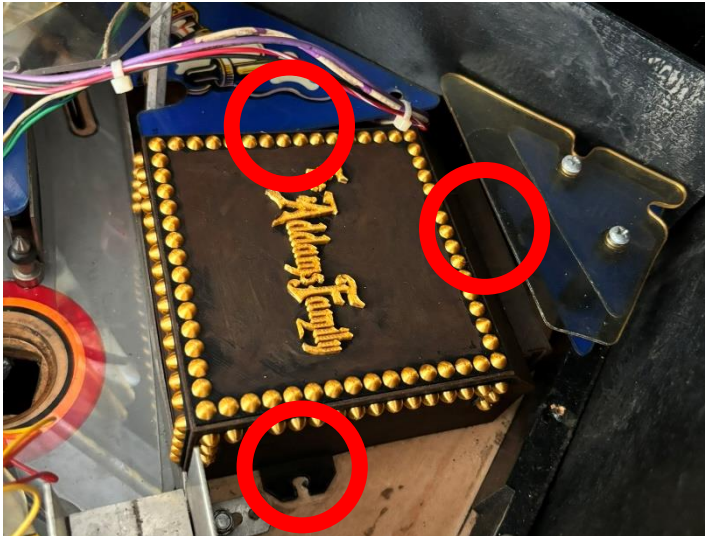

Slide the back in first then the top and adjust with the bottom screw.

4. Reassembly

Step 7: Reattach the Plastics

- Reattach the plastic with the phone and the plastic in the corner that you previously removed.

5. Final Check

Step 8: Finish Up

- Ensure everything is securely in place and recheck the box's functionality.
- Once satisfied, your installation is complete.

You're done! Enjoy your newly installed custom Thing box.